




CODE 0 ASYMMETRIC

The Code 0 Asymmetric is a specialist very close reaching sail. It has a racing rule minimum mid-girth stipulation of 75% of foot length to enable it to be rated as a spinnaker.

The Code 0 is designed for use at wind angles of 45 degrees in light airs to 100 degrees in 12kts of breeze. It can be built from a variety of fabrics from 1.5oz or 2.2oz nylon through lightweight Kevlar laminate with taffeta to high modulus but expensive Cuben fibre. Cuben fibre gives best shape holding and range of use. The lightweight Kevlar taffetas offer good all-round performance at a reasonable price whilst the nylons offer good performance at low cost.

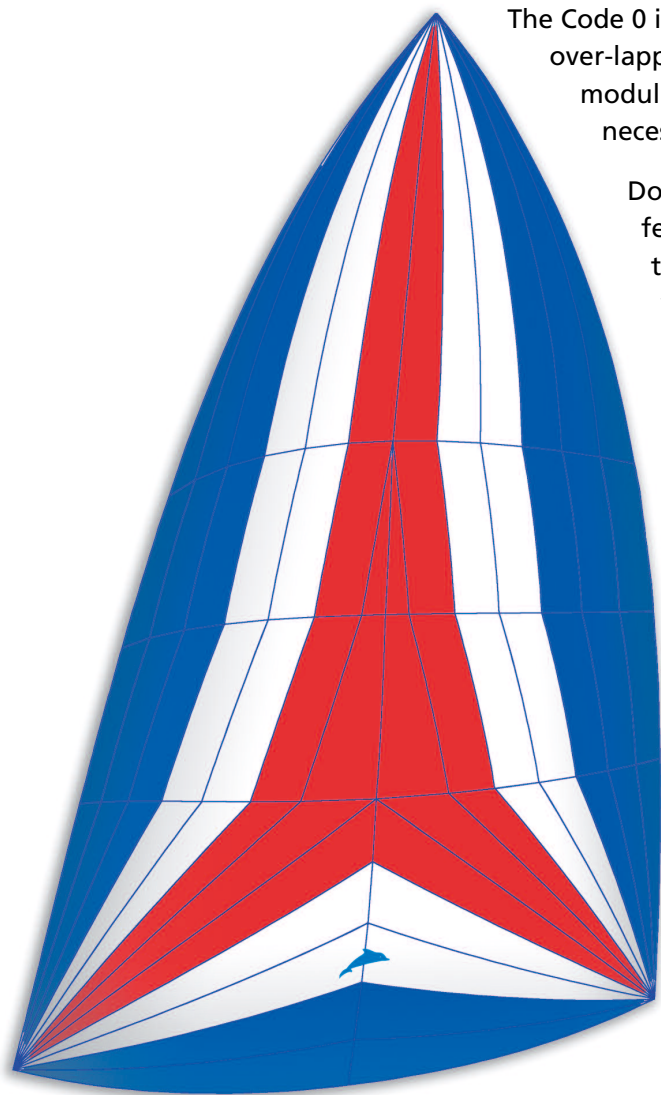

The Code 0 is particularly useful for boats with non over-lapping headsails. The sail is built with a high modulus luff rope to cope with the high luff loads necessary to produce a straight as possible luff.

Dolphin rocked radial code zero type designs feature panels rocked in vertical orientation to allow the stronger warp fibres to align with the high load path in the sail.

This provides the ultimate in shape holding, minimizing distortion and maximizing performance.

Dolphin utilise the best fabrics in the world for durability and longevity.

STANDARD FEATURES

- Highly refined designs.
- Pre-glued seams with three step construction.
- Pre-glued step down patch construction.
- High modulus luff rope.
- Stainless steel rings with webbing strainers.
- Sail numbers.
- Colour coded luff tapes.
- Drawstring sailbag.

EXTRA FEATURES

- Dolphin can source and supply a spar-less furler.
- Turtle or valise launch bag.
- Customized logo or graphics.

Dolphin Sails

400 Main Road, Harwich, Essex CO12 4DN

Tel: (01255) 243366 Fax: (01255) 240920

E Mail: sails@dolphin-sails.com www.dolphinsails.com

*Sails designed, cut
and built in house.*